



THE EASY TO FIT, MANUALLY OPERATED DIY ROOF ROLLER BLIND

Thank you for your interest in our **SkyFit™** roof Roller Blinds.

The **SkyFit™** roof blind can be made in sizes up to 1.5m wide x 1.5m long and is a fantastic solution for small flat roof or sloping roof windows. Fitted on the edge of your reveal and available in both blackout and antiglare fabrics in a range of colours, opacities and hardware options. The **SkyFit™** blind blends in seamlessly with your ceiling to provide a sleek and sophisticated look to any suitable roof window in the home.

- Made to measure in the UK
- Sizes up to 1.5m wide x 1.5m long
- Easy to Measure, Easy to Fit
- Custom made side rails and bottom seal
- Child safe & chain free
- Spring operated mechanism.
- High quality THERMAL blackout or anti-glare fabrics
- 3-year guarantee [on fixtures]



The SkyFit™ blind is capable of blocking light and draughts thanks to the exceptional quality of its individual components.

Each part, from the brush seals to the cassette holder and aluminium frames are designed to last. They come in white and silver to suit a variety of environments and tastes.

Fabrics are available in translucent light filtering and blackout in a wide range of colours.



Product Dimensions



PRODUCT SIZE LIMITS

Min width: 400mm
Max width: 1500mm


Min drop: 400mm
Max drop: 1500mm

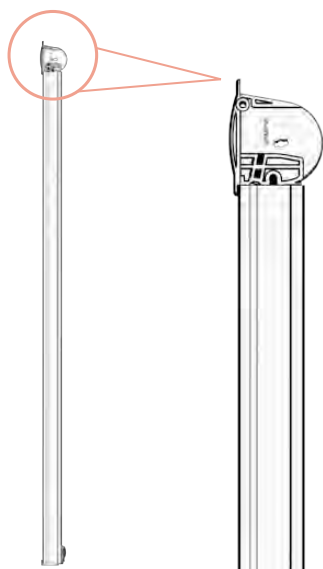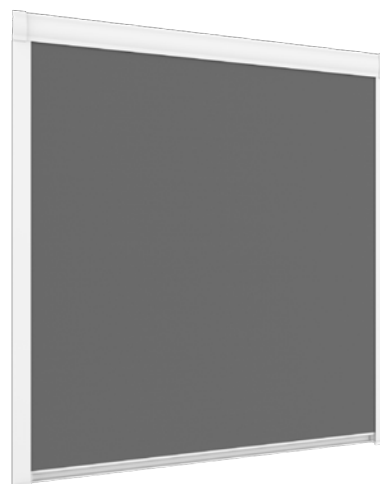

Cassette Height: 60mm
Cassette Width: 32mm
Cassette Depth: 52mm



Cassette

The fabric which is around the spring and barrel mechanism is completely enclosed, the siderails slot into cassette ends on installation.

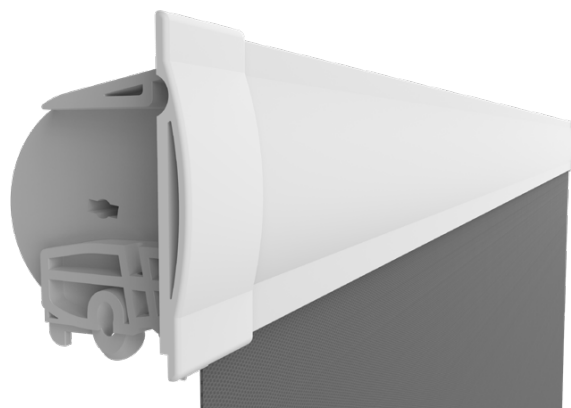


VIDEOS

Product Video

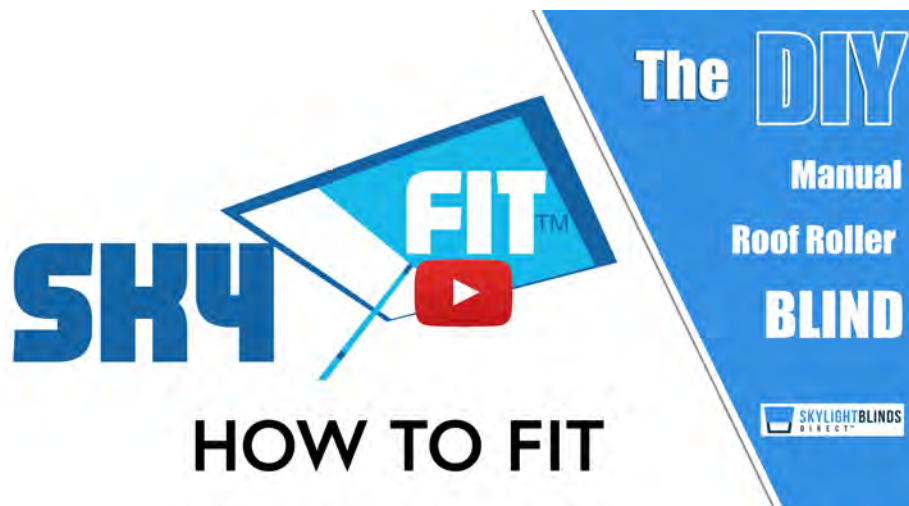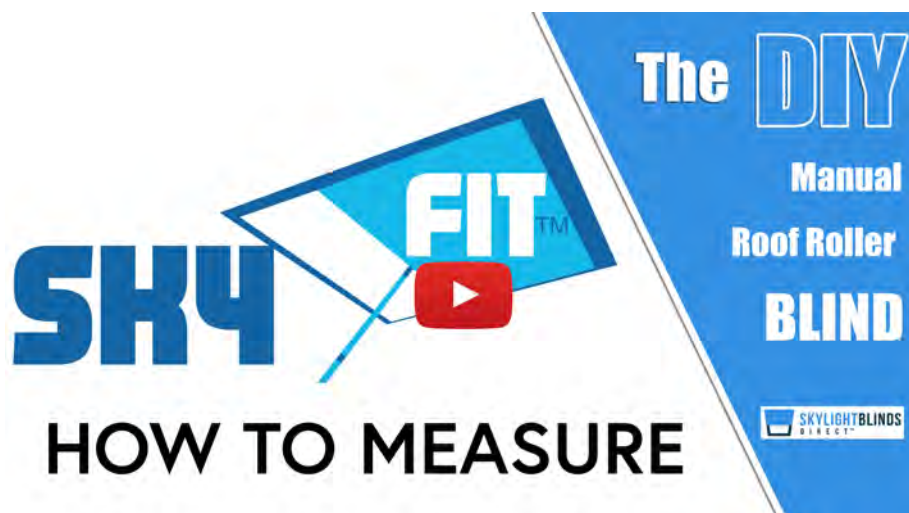

SkyFit™ Blind Features

SkyFit™ blinds incorporate a number of specially developed features that enhance the premium quality of our blinds.

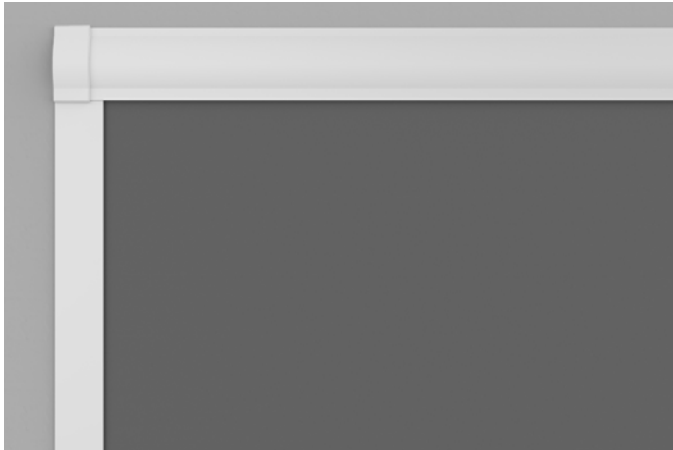

Aluminium Colour Options




White
Matt finish



Anodised Silver
Natural Finish

Fixing Brackets




Child Safe

The SkyFit™ blind is operated via a spring system. The blind pulls down through the siderails locking in place when the handle is released. The handle is then pushed in towards the window releasing the lock which enables the spring to retract the fabric. It is totally cord free.


Seal

Brush and rubber seals are attached to the bottom of the handle, when the blind is closed, they create a barrier between the blind and sill, blocking out light and reducing heat loss.

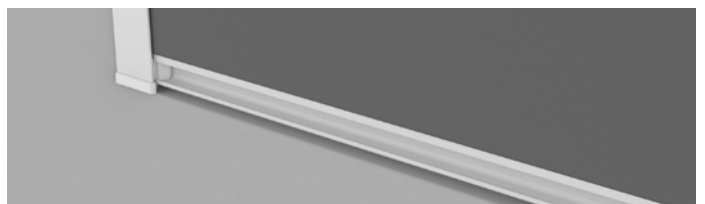

Pips

Pips are attached to the fabric to ensure the blinds stays securely within the runners at all times.

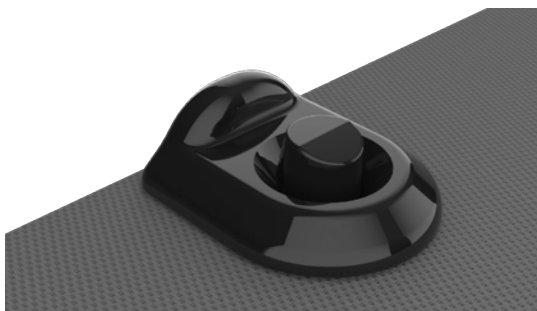


Brush Seals

These create a barrier between the blind and the window frame, blocking out light and reducing heat loss.



Edge of Recess Fitting - ✓ Drill Free Installation

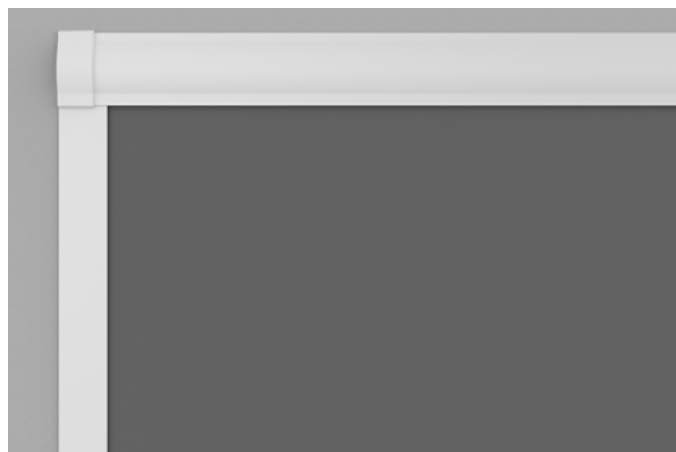

Fabric Colour Options

Blackout



- | | |
|--|--|
|  Ice White |  Baby Pink |
|  Cream |  Dusky Blue |
|  Hessian |  Navy |
|  Charcoal Grey |  Turquoise Vibe |
|  Light Grey |  Leaf Green |
|  Black |  Kiwi |

Translucent

- | | |
|--|--|
|  Bright White |  Rich Red |
|  Delicate Cream |  Orange |
|  Hopsack |  Zest |
|  Clay |  Bright Green |
|  Pale Grey | |
|  Rock Grey | |

Examples of Suitable Windows

For both horizontal and sloping roof windows the SkyFit™ blind sits at the edge of the recess. For sloping roof windows such as conservation windows you must ensure that the handle of the window does not protrude past the window recess.

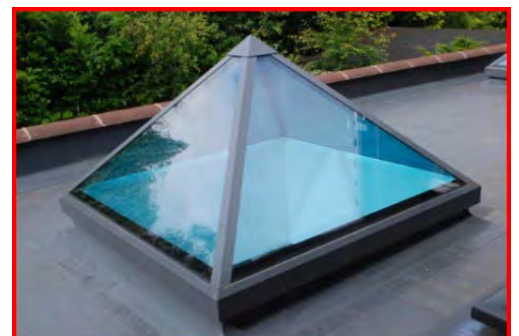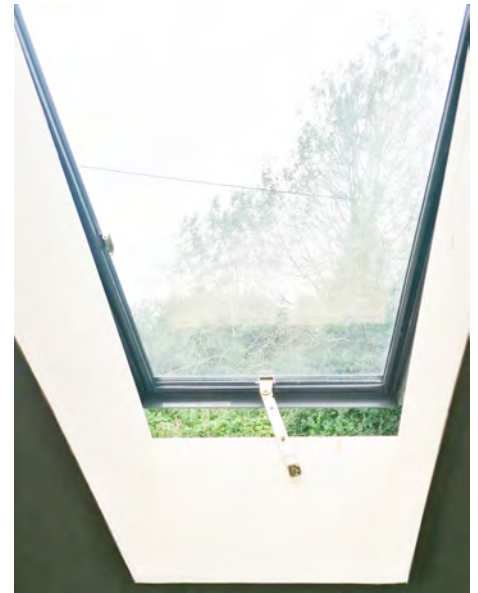


Product tolerance limits

To ensure correct operation and full black out performance the blind can only work within limited window reveal tolerances i.e. the window must be as square as possible, fitting a blind into or on the edge of a window recess outside of the stated tolerances will lead to poor operation, reduced black out performance and or product damage.

The cassette will always be made to the top width (X1)

The widths X2 and X3 Can have no more than +/- 6mm variation from the top width.

The height measurements Y1, Y2 and Y3 must not have a variation of more than +/- 6mm.

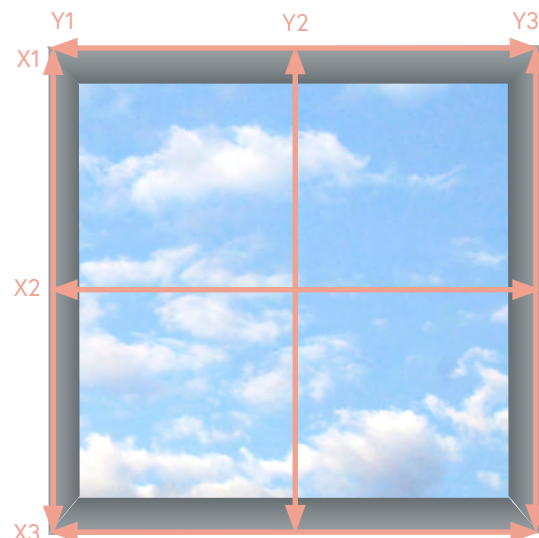

Minimum Size: 400mm width x 400mm length
Maximum Size: 1500mm width x 1500mm length

Operation

The blind is operated via a spring tension system using the handle at the bottom of the blind. The blind simply pulls down through the siderails locking whenever the handle is released, the handle is then pushed in towards the window releasing the lock which enables the cassette to retract the fabric.

If you can reach the ceiling you can operate the blind with your hand, if not, the SkyFit™ blind comes with a FREE 1m-2m telescopic pole. Additional poles are £30 each.



Maintenance

All our products are manufactured using aluminium and glass reinforced nylon components, they do not present any corrosion problems in normal working environments. If there is a failure of a blind, a component can be replaced without the need for a new complete blind.

Replaceable components:

Handle ends (brakes)
Siderail feet
Siderails.

Care

To keep the blind looking it's best through time the customer must ensure the product has been installed and operated securely and correctly, the fabric can be cleaned with a synthetic or feather duster and can be wiped lightly with a damp cloth.

SkyFit™ Order Form

Price Table

		Width (mm)				
Length (mm)	mm	500	700	1000	1200	1500
	500	£150	£180	£210	£270	£280
	700	£180	£210	£240	£290	£300
	1000	£210	£240	£270	£310	£320
	1200	£230	£270	£300	£330	£340
	1500	£250	£300	£330	£350	£360

Prices include VAT and FREE Operating Pole
Additional poles £30

Invoice Address

Name:

Address:

Post Code:

Phone:

Email:

Delivery Address

Name:

Address:

Post Code:

Phone:

Email:

PLEASE PROVIDE SIZES IN MILLIMETRES - MAKE SURE TO MEASURE AT THE EDGE OF THE RECESS

Blind 1

X1:

width at top (where the head of the blind will be)

X2:

width in the middle (can't be more than 6mm different to x1)

X3:

width at the bottom

Y1:

length on the left

Y2:


length on the middle

Y3:

length on the right

Blind 2

How to Measure SkyFit™ Roof Roller Blinds

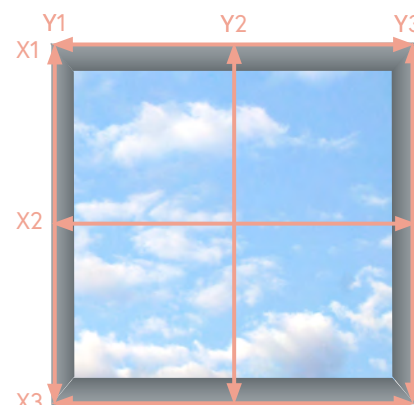







Operating Pole

Frame Colour:

Fabric:

Blackout

Translucent

-  Ice White
-  Cream
-  Hessian
-  Charcoal Grey
-  Light Grey
-  Black

-  Baby Pink
-  Dusky Blue
-  Navy
-  Turquoise Vibe
-  Leaf Green
-  Kiwi

-  Bright White
-  Delicate Cream
-  Hopsack
-  Clay
-  Pale Grey
-  Rock Grey

-  Rich Red
-  Orange
-  Zest
-  Bright Green

Price List

	Width (mm)					
	mm	upto 500	upto 700	upto 1000	upto 1200	upto 1500
Length (mm)	upto 500	£150	£180	£210	£270	£280
	upto 700	£180	£210	£240	£290	£300
	upto 1000	£210	£240	£270	£310	£320
	upto 1200	£230	£270	£300	£330	£340
	upto 1500	£250	£300	£330	£350	£360

Prices include VAT and FREE Operating Pole. Additional poles £30

Minimum Size: 400mm width x 400mm length
Maximum Size: 1500mm width x 1500mm length

Example Prices:

600mm X 600mm: £210

800mm x 900mm: £270

1200mm x 1200mm: £330



www.skylight-blinds-direct.co.uk
Tel: 0800 008 6293 : Email: team@skylight-blinds-direct